

NEW

Displays

Easy to use, easy to move!

DESIGN

Self-service display unit with 4 - 5 shelves inclined at a 5 ° angle to maximise viewing of the products.

Panoramic view with low shelves and side windows.

Stainless steel fabrication with base in black epoxy.

CHARACTERISTICS

Keeps all products at a core temperature of between + 63°C and + 70°C (poultry packed under plastic shells, in bags or different snack packaging) in order to comply with food safety requirements.


Respects the organoleptic qualities required for the food safety of consumers regardless of where placed on the presentation shelf.

Low electric power with connection under 230 V or 380 V so that units can easily be moved to different locations in the store.

FEATURES

- Energy optimization.
- Lighting on each level by halogen lamp.
- Original design with combination of a cylindrical air blowing turbine and radiant heaters.

Ideal for snacking or rotisserie

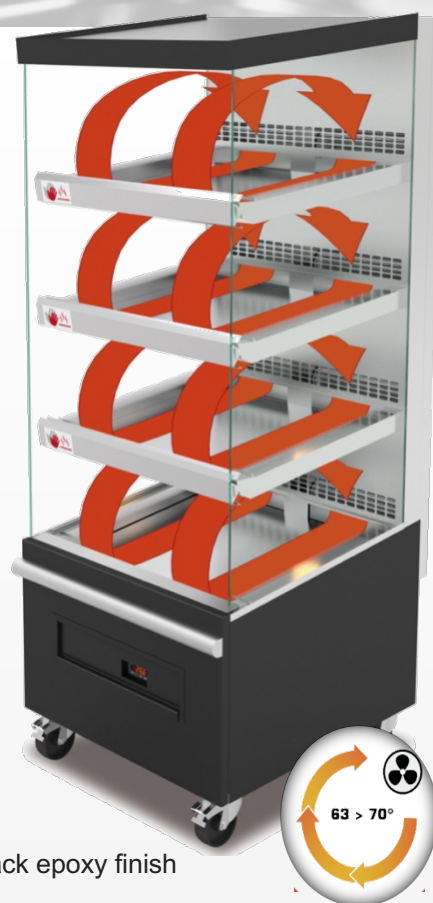

Black epoxy finish



Model	Dimensions in mm (W x D x H)	Power kW	Number of shelves	Poultry capacity
6MCV4LS	650 x 735 x 1,745	3.28 kW single ph	4	24/48
6MCV5LS	650 x 735 x 1,996	4.125 kW 3 ph	5	30/60
10MCV4LS	1,025 x 735 x 1,745	5.6 kW 3 ph	4	40/80
10MCV5LS	1,025 x 735 x 1,996	7.15 kW 3 ph	5	50/100